

Rotating cleaners - Chemitorus 50



PTFE




C-PTFE

Chemitorus 50	
Working pressure:	1 - 4 bar (14.5 - 58 psi)
Cleaning diameter:	max. 2.2 m (7.2 ft)
Flow rate:	0.9 - 1.7 m <sup>3</sup> /h (15 - 28.3 l/min / 4 - 7.5 USgpm)
Spray angle:	360° (optional 180°)
Operating temperature:	max. 65 °C (149 °F)
Ambient temperature:	max. 75 °C (167 °F), 30 min
Insertion opening:	min. Ø 42 mm (1.65 inch)
Materials:	PTFE or C-PTFE
Preferred mounting position:	any

- Chemical resistant - ideal for corrosive environments
- Lightweight construction - safer in glass lined vessels
- High rotation speed
- Low working pressure

Version	Part number
3/8" BSP female / C-PTFE	4660-1732-033
3/8" BSP female / PTFE	4660-1735-122

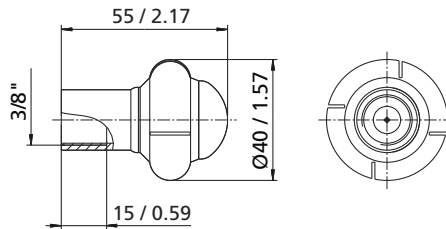

Dimensions (mm / inch)

