

Rotating cleaners - Turbodisc 75




Turbodisc 75	
Working pressure:	2-4 bar (29 - 58 psi)
Cleaning diameter:	max. 2.4 m (7.9 ft)
Flow rate:	4.5 - 6.3 m ³ /h (75 - 105 l/min / 19.8 - 27.7 USgpm)
Spray angle:	360°
Operating temperature:	max. 95 °C (203 °F)
Ambient temperature/SIP:	max. 140 °C (284 °F), 30 min
Insertion opening:	min. Ø 41 mm (1.61 inch)
Materials:	stainless steel 316L (1.4404) with C-PTFE or PTFE
Preferred mounting position:	any

- Effective wash - due to high rotation speed
- Low flow rates

Version ¹	Part number
3/4" BSP female / C-PTFE	4660-1615-003
3/4" BSP female / PTFE	4660-1624-002
3/4" NPT female / C-PTFE	4660-1677-210
3/4" NPT female / PTFE	4660-1677-211

¹ optional with Pin Fix connection

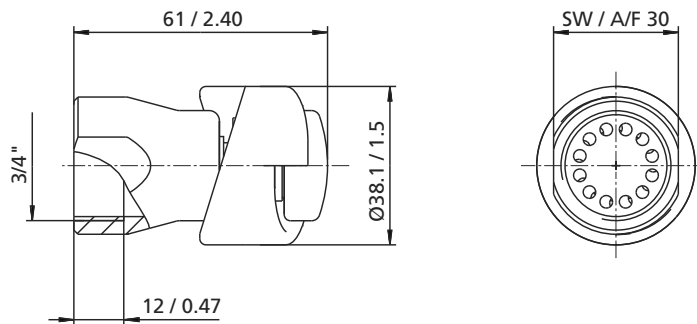

Dimensions (mm / inch)

